Quarterly update

September - November 2026

DELIVERING FOR QUEENSLAND

Logan and Gold Coast Faster Rail

Edens Landing

Holzheimer Road, Bethania
to Holmview Road, Holmview

Key benefits for the community

- Improved network efficiency
- Improved accessibility
- Improved safety

Ongoing activities

Enabling works are underway within and around the Edens Landing precinct and rail corridor. These works include:

- site investigation activities
- vegetation clearing
- installing demountable buildings and equipment
- relocating and installing new services including utilities and drainage
- earthworks and asphalting including access tracks and haul roads
- installing fencing and access gates.

Earthworks and retaining wall construction

Significant earthworks activities and retaining wall construction are required to enable corridor widening, including the use of soil nails in the vicinity of Southern Cross Care:

- near horizontal holes are drilled into the exposed earth face
- tension-resisting steel bars are inserted and grouted into place
- reinforced concrete panels are then installed to create the retaining wall.

See map for earthworks and retaining wall locations.

What to expect

- Increased noise, dust and vibration, with mitigations in place, as required.
- Construction vehicles and equipment, with flashing lights and reversing alarms, for safety.
- Lighting towers at night, directed away from residences where possible.
- Increased workforce and construction traffic on local roads, including heavy vehicles.
- Increased vehicles accessing the rail corridor gates, via local streets. *See map over page.*
- Changed traffic conditions on local roads, with signage and traffic control in place.
- Changed pedestrian access conditions and amenity at local parks including Grove Road Reserve dog park and Edens Parkland.
- Temporary site facilities and storage area, at Edens Landing station and Eddy Avenue.
- Qualified fauna spotters/catchers during vegetation clearing works.

Construction lookahead

In addition to the ongoing enabling works, between Holzheimer Road, Bethania and Holmview Road, Holmview, the following works will be undertaken within and around the rail corridor:

- earthworks to prepare the ground for track laying activities, construction of access tracks and laydown areas
- retaining wall construction, including soil nail installation
- installing overhead line infrastructure, including piling works for foundations
- constructing walking and cycling connections
- installing drainage
- cable service route installation works including excavation and concreting.

Please see map over the page.

These works are part of preparing for major construction to commence in late 2026.

Work hours

- **Standard work hours:** 6.30am to 6.30pm, Monday to Saturday.
- **Out of hours works:** Intermittently, 6.30pm to 6.30am, Monday to Sunday and 6.30am to 6.30pm Sundays
- **24/7 works:** Monday 14 September – Monday 5 October 2026

Weather and site conditions permitting.

We appreciate your patience during these works. We will continue to keep you updated as works progress.

Track closures

Between **Saturday 19 September to Sunday 11 October 2026**, there will be track closures and travel changes on the Beenleigh and Gold Coast train lines.

Please consider your travel options, plan ahead, and allow extra travel time.

Download the **Translink app**, visit **translink.com.au** or call **13 12 30**.

Stay up to date

Search on tmr.qld.gov.au:
'Logan Gold Coast Faster Rail'

Email: lgcrail@activusalliance.com.au

Call: 1800 957 066 (all hours)

For information in **Gagana Sāmoa**, **ਪੰਜਾਬੀ**, **简体中文**, **عربي** and **தமிழ்** or other support services, please contact the project team on **1800 957 066** (9am – 5pm Monday to Friday).

For more information, **scan the QR code.**

www.tmr.qld.gov.au/logangoldcoastrail


13 QGOV (137468)
www.tmr.qld.gov.au | www.qld.gov.au

Australian Government | BUILDING AUSTRALIA

QueenslandRail

Queensland Government

Edens Landing works area – Holzheimer Road, Bethania to Holmview Road, Holmview

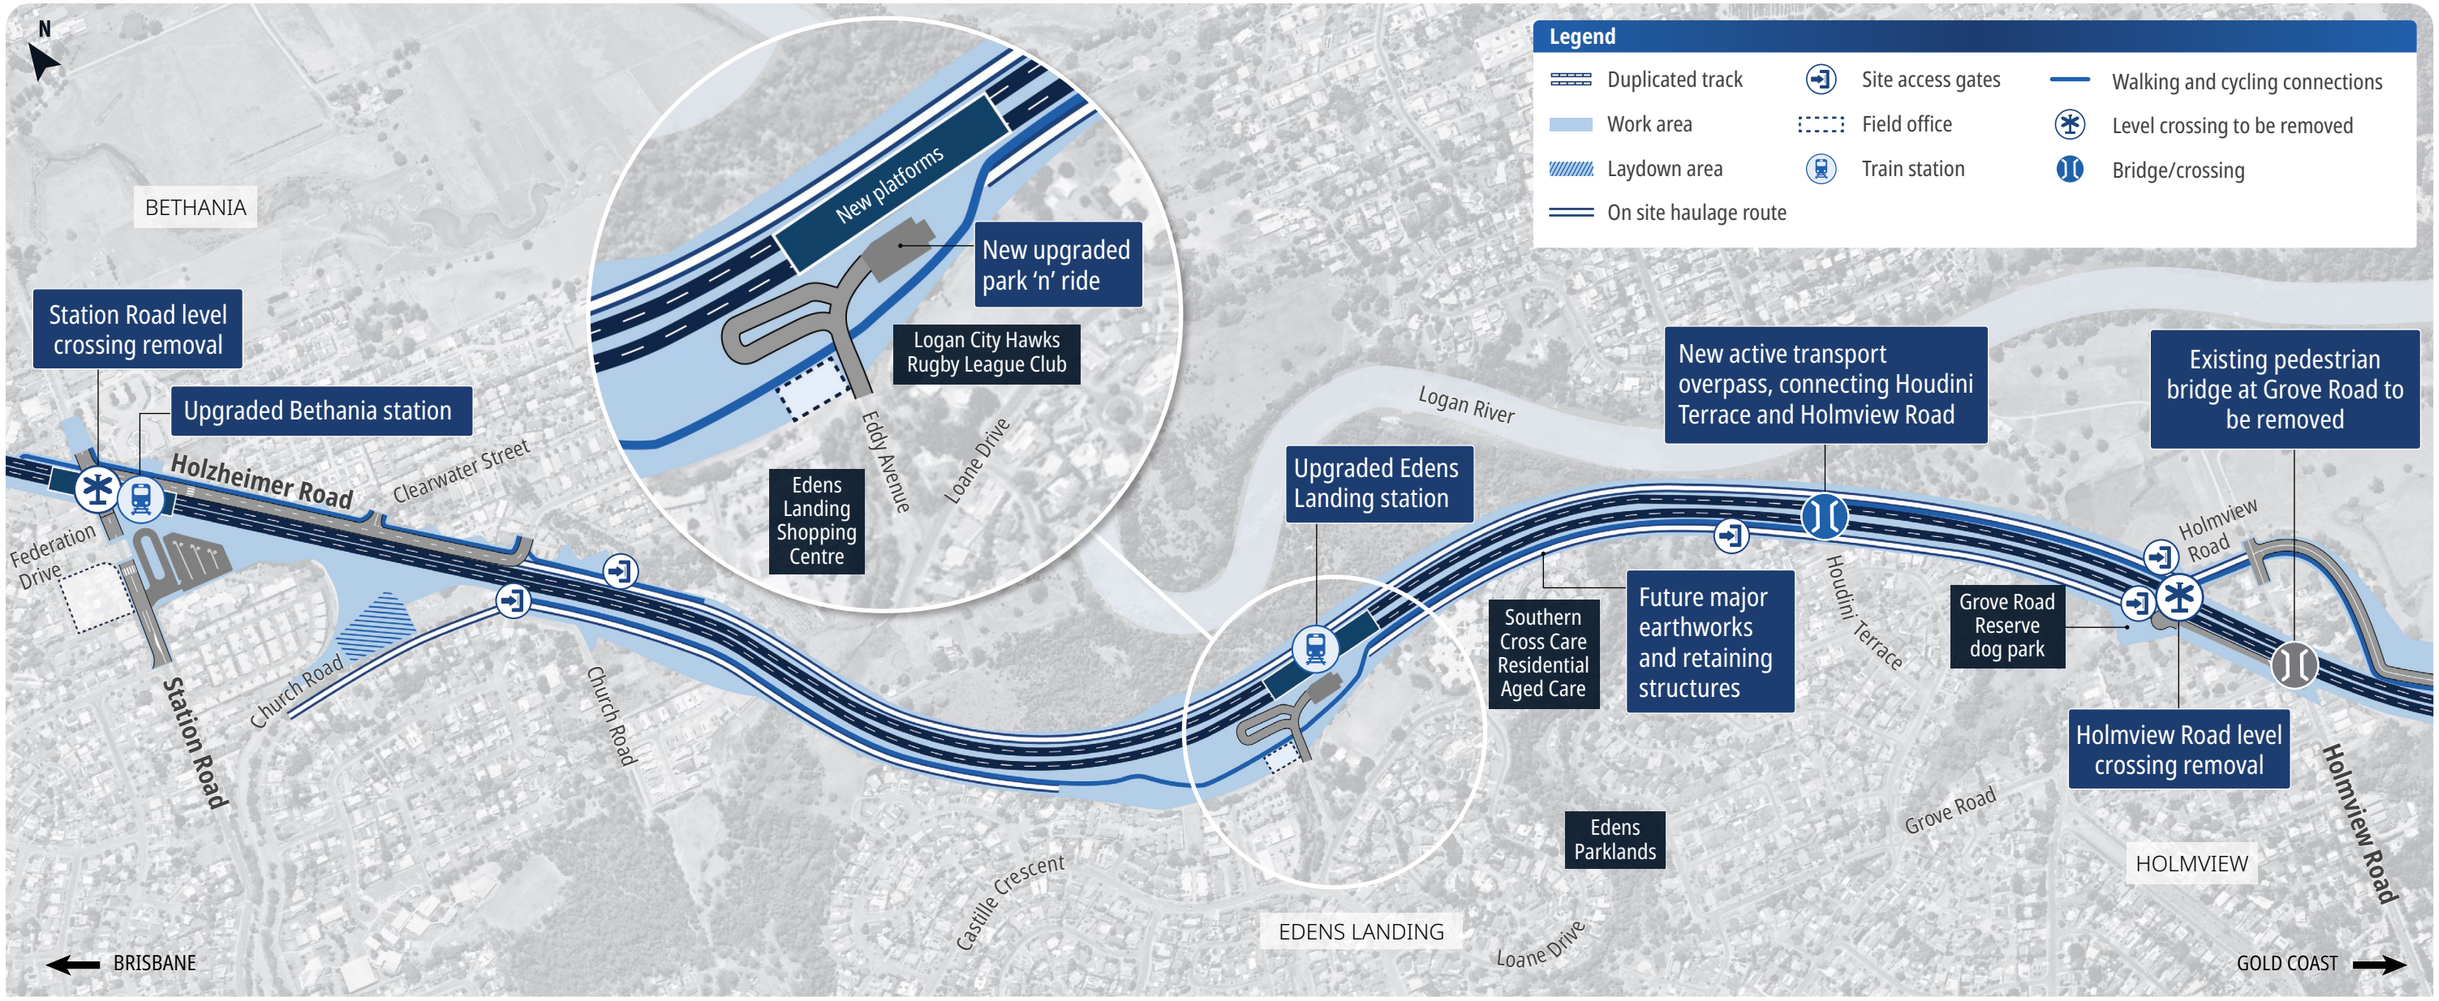

This plan is subject to change and further design development.

About the works

Holzheimer Road, Bethania to Holmview Road, Holmview

- Widening the rail corridor, including major earthworks and constructing retaining walls. *Please see map*
- Relocating and installing new tracks and other rail infrastructure
- Upgrading Edens Landing station
- Removing Holmview Road level crossing
- Local road improvements – Holzheimer Road, Eddy Avenue and Holmview Road
- A new walking and cycling bridge over the rail line in the vicinity of Houdini Terrace and connections to Holmview Road

About the Logan and Gold Coast Faster Rail project

These works are part of the Logan and Gold Coast Faster Rail (LGC) project, which includes:

- doubling the tracks between Kuraby and Beenleigh
- providing modern station upgrades and improved walking and cycling connections
- removing five open level crossings.

The LGC project is jointly funded by the Australian and Queensland governments.

Scan the QR code to receive email updates and notifications. You can select the station precinct/s most relevant to you.